

# CALABAR

### Calabar

- Rubber hose range for liquid and compressed-air applications
- Typically used for cooling
- Fittings based on push-lock technology
- Available in black, blue and red

CoreDux rubber hose range								
Nominal Hose Size [mm (in.)]	Hose materi al	Hose Inside dia. [mm (in.)]	Hose outside dia. [mm (in.)]	Minimum inside bend radius [mm (in.)]	Working pressure at -40ºC to 20ºC (-40ºF to 70ºF) [bar (psig)]	Minimum Burst Pressure at 20ºC (70ºF) [bar (psig)]	Temp. Range [ºC (ºF)]	Bulk hose weight [kg/m (lb/ft)]
DN006 1/4"	Rubber	6,7 (1/4")	13.2 (0.52)	65 (2.56)	24 (350)	97 (1400)	-40 to 88 (-40 to 190)	0.13 (0.09)
DN010 3/8"	Rubber	10 (3/8")	16.4 (0.65)	75 (2.95)	24 (350)	97 (1400)	-40 to 88 (-40 to 190)	0.17 (0.11)
DN012 1/2"	Rubber	13,2 (1/2")	19.6 (0.77)	125 (4.92)	21 (300)	84 (1200)	-40 to 88 (-40 to 190)	0.24 (0.16)
DN016 5/8"	Rubber	16 (5/8")	22.4 (0.88)	150 (5.91)	21 (300)	84 (1200)	-40 to 88 (-40 to 190)	0.27 (0.18)
DN020 3/4"	Rubber	19 (3/4")	26 (1.02)	180 (7.09)	21 (300)	84 (1200)	-40 to 88 (-40 to 190)	0.32 (0.22)
DN025 1"	Rubber	25,4 (1")	32.4 (1.28)	250 (9.84)	14 (200)	56 (800)	-40 to 88 (-40 to 190)	0.4 (0.27)

#### Compliance

- EN ISO 9001
- EN 16643

#### Packaging

- Each hose is bagged individually and boxed.
- Longer hoses are coiled, bagged and boxed.
- Labeling with the production date.

#### **Color available**

- Black, blue and red
- More colors are available upon request.

#### Cleanliness

• CoreDux standard cleaning: White room clean

#### **Product tests**


• Air underwater pressure test.



No warranty is given, express or implied, either with respect to the correctness, accuracy and completeness of this document, or with respect to its suitability for your intended use. Also, we reserve the right to make changes to this document at any time. It is your responsibility to verify that you possess the latest version of this document.




# **CALABAR** Tube adapters tube weld




Fitting size	CX Part number	LT [mm]	LB [mm]	Min. ID [mm]	Max. OD [mm]
1/4" TB	CX-71647	45	19	4.8	6.4
3/8" TB	CX-71648	49	19	7.8	9.5
1/2" TB	CX-71650	53	19	10.5	12.7
3/4" TB	CX-71651	72	27	16.6	19.1
1" TB	CX-71652	85	27	22.1	25.4

## **Insert NPT**



Fitting size	CX Part number	LT [mm]	LB [mm]
1/4" NPT	CX-71420	36	11
3/8" NPT-1	CX-71421	40	12
1/2" NPT	CX-71422	47	14
5/8" NPT	CX-71423	52	15
3/4" NPT	CX-71424	59	16
1" NPT	CX-71425	75	17






Fitting size	CX Part number	LT [mm]	LB [mm]
1/4" BSPP	CX-71426	37	11
3/8" BSPP	CX-71427	42	12
1/2" BSPP	CX-71428	48	14
5/8" BSPP	CX-71429	54	15
3/4" BSPP	CX-71430	61	16
1" BSPP	CX-71431	65	17

No warranty is given, express or implied, either with respect to the correctness, accuracy and completeness of this document, or with respect to its suitability for your intended use. Also, we reserve the right to make changes to this document at any time. It is your responsibility to verify that you possess the latest version of this document.




#### Unions



Fitting size	CX Part number	LT [mm]	LB [mm]
1/4" Union	CX-71836	48	18
3/8" Union	CX-71837	56	22
1/2" Union	CX-71838	64	26
5/8" Union	CX-71839	74	31
3/4" Union	CX-71840	86	37
1" Union	CX-71841	112	50

## **Ordering instructions**

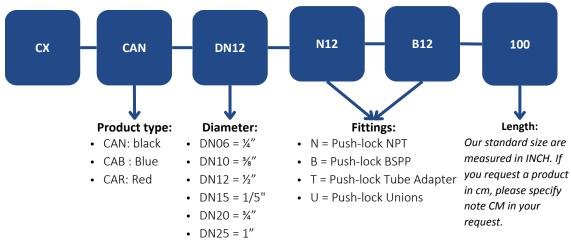

#### **Options:**

- Labeling requirements.
- Bulk hose and spare fittings on request for service and repairs